

Schedule Setup

Introduction: One feature of the DVR is the Schedule screen. The Schedule function allows you to set up different times and ways to record for each day of the week along with allowing you to set these options for each and every channel on the system. From 24 hour recording every day to a basic 9 to 5 on weekdays, whichever you're recording needs this guide will explain how to properly setup and schedule your recordings.

Step 1: Let's begin by opening the On Screen Menu by right clicking, then select Main Menu from the bottom. Once you are viewing the Main Menu select the Setting option in the upper right. Once inside the settings screen select the icon that says Schedule.



Step 2: Now that we are viewing the Schedule window. You will notice many options to choose from, look below to get a better understanding of each.

Channel PreRecord

Week Day Record Type

Period 1

Period 2

Period 3

Period 4

Period 5

Period 6

Channel: Select the channel from the dropdown menu to change options for each. Also, at the bottom of the dropdown menu is the 'ALL' option, which will set the options for every channel

Prerecord(seconds): Prerecord begins recording before the scheduled time in the amount of seconds you specify.

Weekday: Select which day of the week to set your schedule on. Also, the ALL option is available for selection allowing you to set a schedule for everyday of the week.

Period 1-6: This area allows you to set up to 6 timeframes to record. The column on the left is the begin time and the column on the right is the end time. *For example the picture to the left is set to record for all 24hrs of the day.*

Regular	MD	Alarm	MD&Alarm
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Schedule Type Area: This area allows you to schedule what type of recording needs to be activated at the corresponding time.

Regular-Regular Recording

MD-Motion Detection Recording


Alarm-Alarm Recording

MD&Alarm: Motion & Alarm Recording

The corresponding box's below allow you to activate these for the different periods of time set. When the box is filled in, that type is activated.



Timeline: The timeline gives you a visual of your scheduled recordings and recording type for that day. *As you can see in the above picture we are set to regular record for 24hrs a day.*

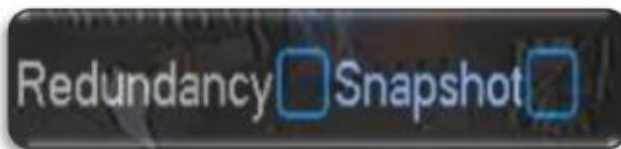

Redundancy: This feature allows you to record the same thing to more than one Hard Drive at a time.

Snapshot: This feature allows you to capture a picture once an Alarm is activated.

Step 3: Now that we have a better understanding of each function on the schedule screen we can now set up a schedule. For tutorial purposes we are going to setup the DVR to Regular recording on all channels from 9-5 for Monday through Friday. First, select All from the channels dropdown menu. Next, since we are setting up a 9am to 5pm schedule on weekdays only let's start by selecting Monday from the 'Weekday' dropdown list. Next, in the field to the right of Period 1 we will set our timeframe of 09:00 to 17:00. Keep in mind the times scheduled will be in the 24HR time format (17:00 = 5pm).

SCHEDULE

Channel: All | PreRecord: 4 sec. | Redundancy: | Snapshot:

Week Day	Record Type	Regular	MD	Alarm	MD&Alarm
Mon	Period 1: 09 :00 - 17 :00	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Period 2: 00 :00 - 24 :00	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Period 3: 00 :00 - 24 :00	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Period 4: 00 :00 - 24 :00	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Period 5: 00 :00 - 24 :00	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Period 6: 00 :00 - 24 :00	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Legend: ■ Regular, ■ MD, ■ Alarm, ■ MD&Alarm

Timeline: AM 12 3 6 9 12 PM 3 6 9 12